

## ∞ k \ \ 7h° V-O

- Standard Panel Size: 18"
- Standard Profile: Striated w/ Clip Relief
- Standard Gauge: 24g
- Easy to Install - Clips Required
- Minimum Slope 3:12
- Profile Options: Smooth, Striated or Stiffening Ribs
- Gauge Options: 24g & 26g
- Optional Widths: 12" & 16" *\*additional cost may apply*

@


Easy to Install - Clips Required

Recommended Underlayment: Self Adhering High Temp

Panels must be installed over a completely waterproofed structure in order to ensure watertightness. If the waterproof membrane is mechanically attached with metal fasteners of any type, fasteners should be covered to protect the under-side of the metal roof panels.



*\*\* lip relief not shown*

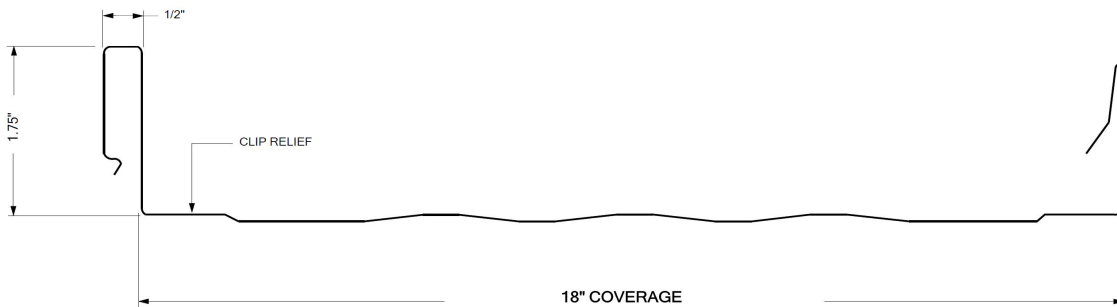

# \

*\*more options available - please inquire*

